

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 10 TOWNSHIP 15 RANGE 2

DATE: 9-21-03

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison

METHOD OF ESTABLISHMENT: County: 7-13-97



IN. S.P.C. E ZONE NAD '83

NAME: 15021002

N: 501523.0362(m)

E: 45859.3651(m)

Rockville Road 0 N/S

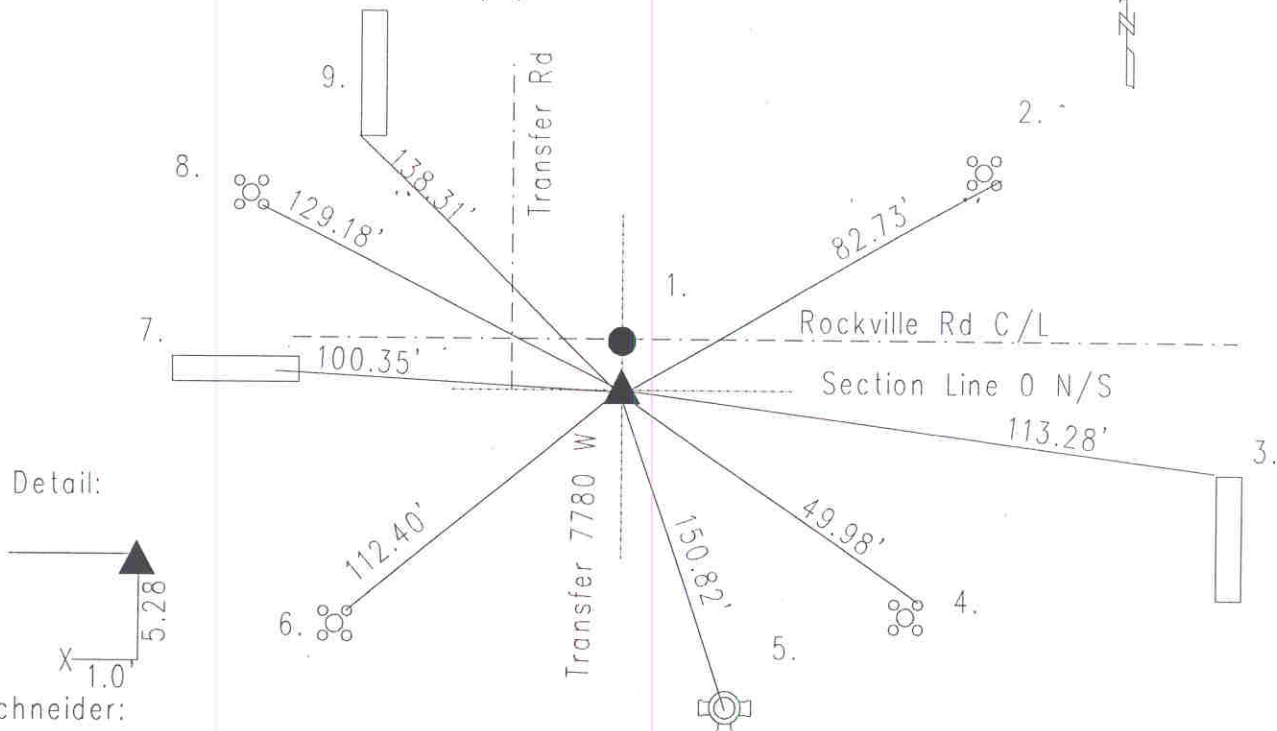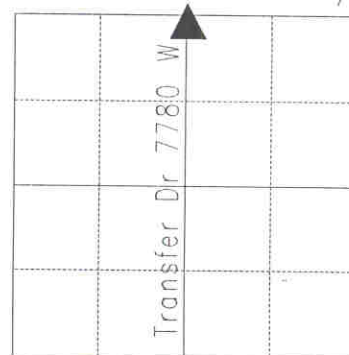

Schneider:

Original post set 1820 by Laughlin with witnesses: 4" black walnut N 3 W 5 links; 14" elm N 21 E 25 links per Marion County Atlas pg. 2. Hosbrook 4-7-1852 called no stone or witness, found, but, a new witness was 20" walnut S 17 E 73 links per Wayne Township Legal Survey Book pg. 26. Monroe 3-2-58 called PK nail. Miller 4-15-76 called brass plug. Wilcoxon 11-3-76 called same. Ross 8-15-86 called same. Kiste 7-13-95 called same. Excavated by Wilcoxon 6-3-97 Harrison set in position of the corner in accordance with the Rockville Road Construction project. 15021002

REF.	DISTANCE	DESCRIPTION
1.	11.00'	Due N to Rockville Road centerline
2.	82.73'	Cut 'x' SE-bolt of aluminum pole base
3.	113.28'	NW corner of sign frame
4.	49.98'	Cut 'x' NE bolt of aluminum pole base
5.	150.82'	Top nut of fire hydrant
6.	112.40'	Cut 'x' NE bolt aluminum pole base
7.	100.35'	Cut 'x' in median
8.	129.18'	Cut 'x' SE bolt aluminum pole base
9.	138.31'	SW corner of metal sign